

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
25 November 2004 (25.11.2004)

PCT

(10) International Publication Number
WO 2004/101912 A2

(51) International Patent Classification⁷: **E04G 21/32**

(21) International Application Number:
PCT/CA2004/000650

(22) International Filing Date: 30 April 2004 (30.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/470,870 16 May 2003 (16.05.2003) US

(71) Applicant and

(72) Inventor: PAQUETTE, Denis [CA/CA]; Box 575, 30 Hill Street, Wahnapiatae, Ontario P0M 3C0 (CA).

(74) Agent: GOWAN, Gerald, A.; Marks & Clerk, 1075 North Service Road West, Suite 203, Oakville, Ontario L6M 2G2 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SAFETY RESTRAINT SYSTEM

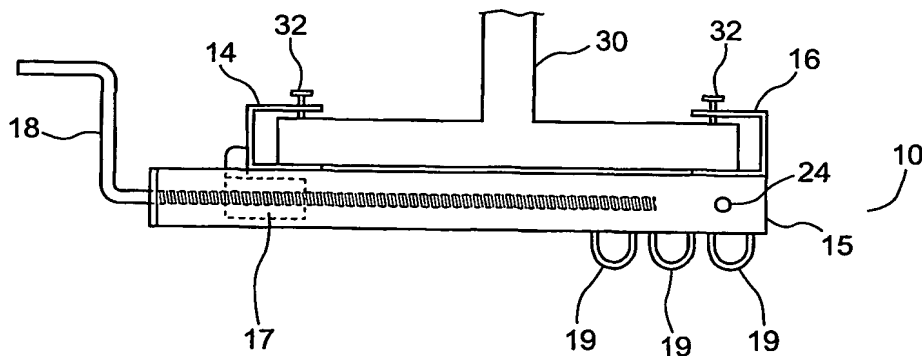

(57) Abstract: A safety restraint device and system are provided for establishing a fall arresting system for steel frame workers. The base unit of the devices can be rapidly attached to vertical steel I-beams by having a clamp for attachment to the beams. The base unit also has a mounting bracket to which a cable support accessory, for example, can be rapidly attached. The cable can then be extended and attached to similar devices on adjacent beams. Other accessories can also be used to provide temporary handrails, platforms and the like which are supported by the base units of the devices. A rapidly deployable system which provides improved worker safety is provided.